

Software

Survey Master

Compatible with most of Android devices

Easier survey workflow via Wizard function

Support up to 60° IMU tilt compensation



Support all survey modes, including Static, PPK and RTK

Support Surface Stake, Mapping Survey and etc. to serve various survey tasks


Support CAD import and directly use for stake out operations

Support Convert function from ComNavBinary raw file to RINEX


Optional

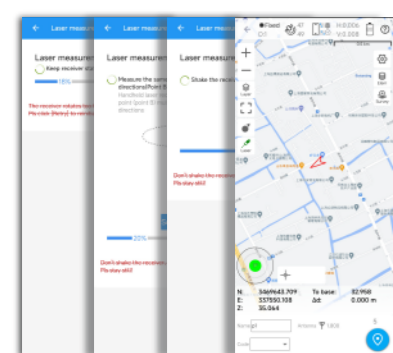

IMU Tilt Survey

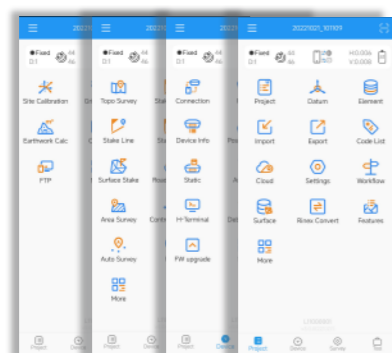

New Interface

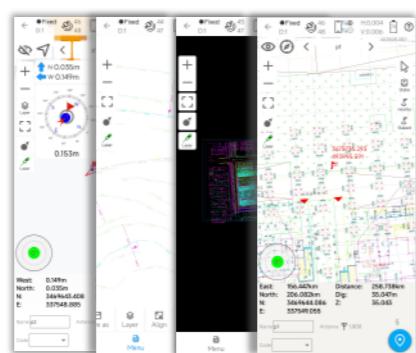

CAD Basemap and Stake

Post-processing Software

SinoGNSS Compass solution software



Provide the complete GPS/GLONASS/BeiDou/GALILEO post-processing solution

Support GNSS observation data in RINEX and ComNav Raw Binary Data format

Support different post-processing in static and kinematic modes

Output analysis reports in various formats (web format, DXF, TXT, KML)

Supports DJI's P4R data format. Processing results can be imported into photogrammetry and 3D modeling software directly

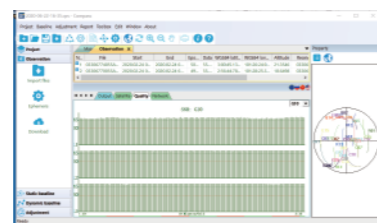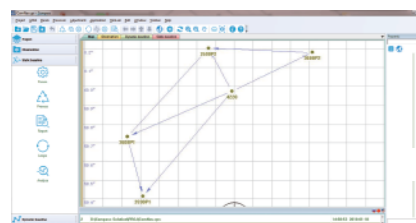

Mars Laser RTK

GNSS Surveying System

Ver.2023.07.13

Signal Tracking

Channel: 1590
 GPS: L1C/A, L1C, L2P, L2C, L5
 BDS: B1I, B2I, B3I, B1C, B2a, B2b
 GLONASS: G1, G2, G3
 Galileo: E1, E5a, E5b, E6c, E5 AltBOC
 QZSS: L1C/A, L2C, L5, L1C
 IRNSS: L5
 SBAS: L1C/A

Performance Specification

Signal Re-acquisition: ≤1s
 Cold Start: ≤45s
 Hot Start: ≤15s
 RTK Initialization Time: <10s(Baseline≤10km)
 Initialization reliability: ≥99%
 Data Update Rate: 1Hz, 2Hz, 5Hz, 10Hz, 20Hz

Mode	Accuracy
Static and Fast Static	Horizontal 2.5 mm + 0.5 ppm RMS Vertical 5 mm + 0.5 ppm RMS
Long Observations Static	Horizontal 3.0 mm + 0.1 ppm RMS Vertical 3.5 mm + 0.4 ppm RMS
Signal Baseline RTK	Horizontal 8mm + 1ppm RMS Vertical 15mm + 1ppm RMS
DGPS	<0.4m RMS
SBAS	Horizontal 0.5 RMS Vertical 0.8 RMS
Standalone	1.5m 3D RMS
Laser Tilt Measurement	≤5.5cm (5m range, ≤60°Tilt in laser mode)

Data Format

Correction data I/O: RTCM2.X, 3.X,CMR(GPSonly),CMR+(GPSonly)
 Position data output: - ASCII: NMEA-0183 GSV, RMC, HDT, GGA, GSA, ZDA, VTG, GST; PTNL, PJK; PTNL, AVR; PTNL, GGK
 -ComNav Binary update to 20 Hz

Electrical and Battery

Voltage: 7-28VDC
 Power Consumption: 1.7W⁴
 Li-ion battery capacity: 2 x 3400 mAh
 Working Time: ≥20h
 Memory: 8GB

1. UHF modem is default configuration and it can be removed according to your specific needs.
2. Integrated UHF ranges from 410 to 470 MHz with 12.5 KHz channel spacing.
3. Working distance of internal UHF varies in different environments, the maximum distance is 15 Km in ideal situation.
4. Power consumption will increase if transmitting corrections via internal UHF

Communication

1 Serial port (7 pin Lemo)
 - Baud rates up to 921,600 bps
 Enhanced UHF modem¹
 : Tx/Rx with full frequency range from 410-470 MHz²
 - Transmit power: 0.5-2 W adjustable
 - Range: 15 km³
 WIFI/4G modem
 - LTE-FDD:
 B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28
 - LTE-TDD: B38/B39/B40/B41
 - WCDMA: B1/B2/B4/B5/B6/B8/B19
 - GSM: B2/B3/B5/B8
 Position data output rates: 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz
 5 LEDs (indicating Satellites Tracking, RTK Corrections data, GPRS Status and Power)
 2 Function buttons for Power and Static Data Record
 Bluetooth ® : V 4.0 protocol, compatible with Windows OS and Android OS
 Calibration-free IMU integrated for Tilt Survey
 Up to 60°tilt with 2.5 cm accuracy

Environmental Specification

Working Temperature: -40 C~+65 C
 Storage Temperature: -40 C~+85 C
 Humidity: 100% non-condensing
 Water- & Dustproof: IP67
 Shock: Survive a 2m drop onto the concrete
 Vibration: MIL-STD-810G Method 514.6 procedure I
 Specifications subject to change without notice.

Physical Specification

Dimension: Φ 15.5cm x 7.3cm
 Weight: 1.2kg with two batteries

Laser Specification

Range: 10m
 Accuracy(room temperature): (3-5)mm + 1ppm
 Measuring Frequency: Classic Value: 3Hz
 Maximum Value: 5Hz
 Laser Injection Power: 0.9mW~1.5mW
 Working Temperature: -20 C~+50 C
 Storage Temperature: -30 C~+60 C



Mars Laser RTK

Universe Series GNSS Receiver

LASER RTK - INNOVATION MAKES THE DIFFERENCE










ComNav Technology Ltd.
 Building 2, No. 618 Chengliu Middle Road,
 201801 Shanghai, China
 Tel : +86 21 64056796
 Fax: +86 21 54309582
 Email: sales@comnavtech.com
 www.comnavtech.com



Features

DISCOVER A NEW ERA OF SURVEY WITH MARS LASER RTK RECEIVER

With cutting-edge laser technology, Mars Laser RTK revolutionizes your measurements, enabling you to tackle diverse surveying scenarios with ease. Explore new horizons, simplify your workflow, and embrace innovation with Mars Laser RTK.

SATELLITE TRACKING			SATELLITE TRACKING		
	GPS	L1C/A, L1C, L2P, L2C, L5		QZSS	L1C/A, L2C, L5, L1C
	BDS	B1I, B2I, B3I, B1C, B2a, B2b		IRNSS	L5
	GLONASS	G1, G2, G3		SBAS	L1C/A
	Galileo	E1, E5a, E5b, E6c, E5 AltBOC			

Laser Technology

The combination of the conventional GNSS receiver and the laser module reduces the difficulty of working in special cases, and fit the usage habits of surveyors.




Longer Working Range

The built-in transceiver datalink module has a super long working distance of up to 15KM. Mars can be switched as a rover or base at will.



Full-Constellation Multi-Frequency

With 1590 channels and 60+ satellite tracking capabilities, Mars also supports PPP service. Getting fixed in seconds boosts your productivity.



Third Generation IMU Improves 30% Efficiency

Mars features a 3rd generation IMU, which significantly enhances initialization speed and simplifies surveying operations in the field. It can still support 60° compensation in the laser mode.



Robust Design


A shock-resistant, dustproof, and waterproof aluminium magnesium alloy body ensures uninterrupted performance wherever you are.

IP67



Mars Laser RTK

The Mars Laser RTK is an innovative GNSS receiver that integrates the latest GNSS, IMU, and laser technologies, resulting in a stunning experience. In previously hard-to-reach, signal-obstructed, and dangerous fields, the millimeter-level laser distance meter on Mars's back makes surveying and stakeout easier and more stable. Mars is equipped with the latest K8 platform, and tracks 1590 channels for all running and existing satellite constellations. The built-in IMU sensor supports up to 60° tilt compensation, ensuring high-precision results.

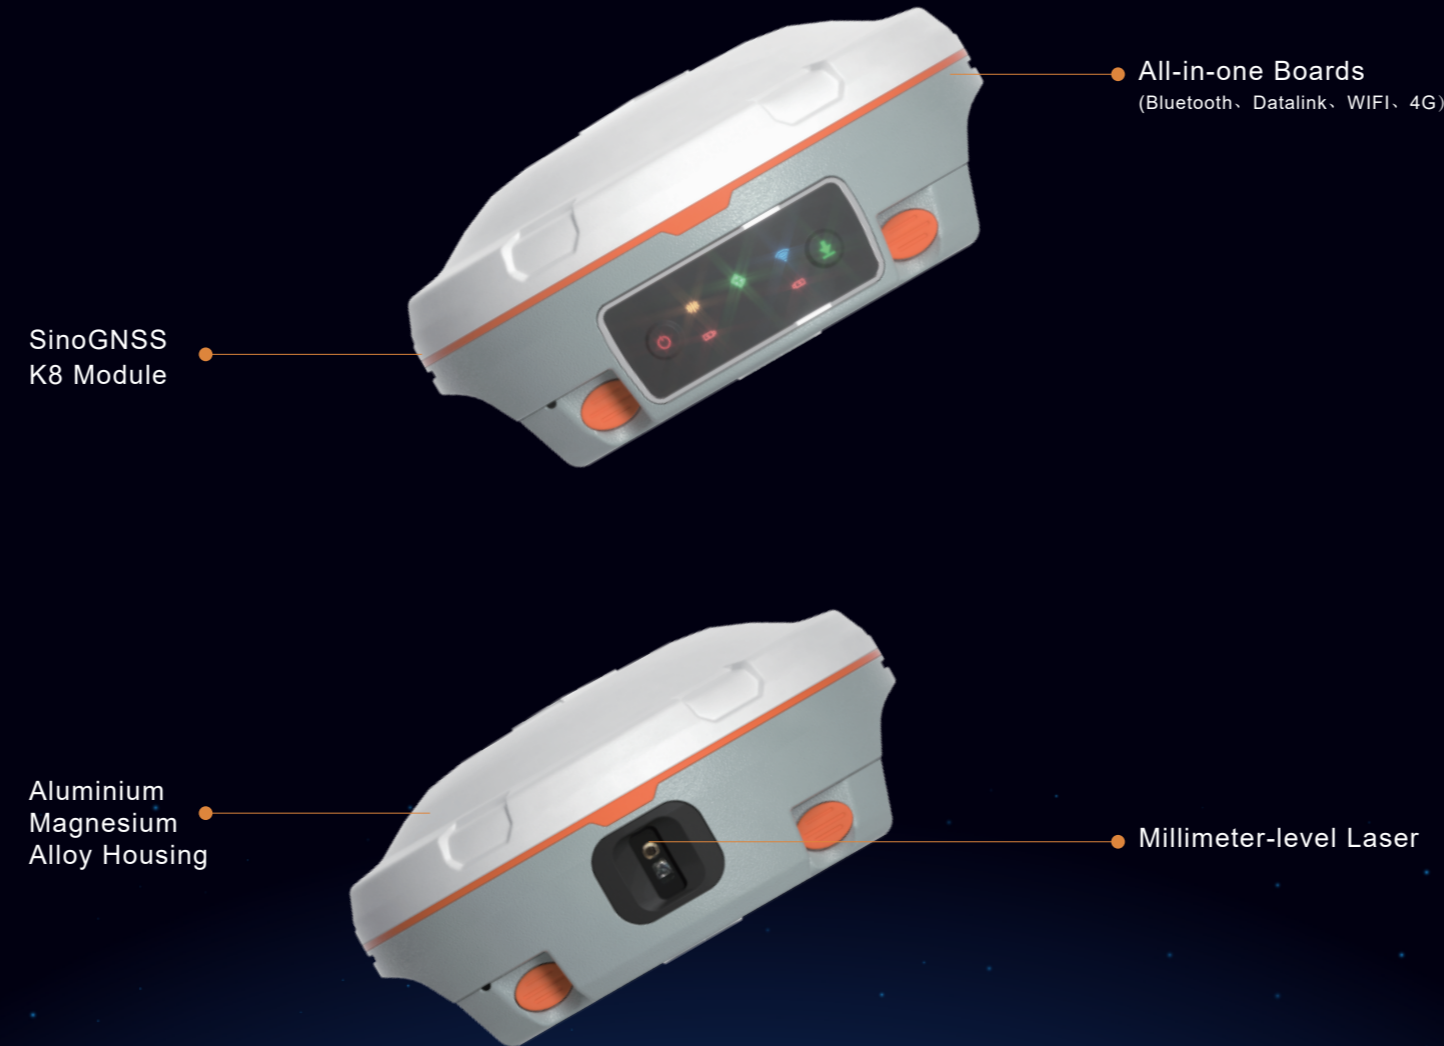

R60 Data Collector

5.5 inch sunlight readable screen
1080P HD display

Patent for design,
ergonomic operation

With advanced **NFC**,
tedious matching is a
thing of the past

9000mAh Li-Polymer Battery
for continuously working **30+**
hours
QC3.0, 0.5h charging
enables all-day use

Survive a 1.6m drop onto the
concrete
Anti-static design, excellent
heat dissipation

Physic **full QWERTY** keyboard
speeds up working efficiency

5.0 Dual-mode Bluetooth, ultra long
range Bluetooth connection

Qualcomm 8-core
processor **Android 12**
operation system
with **GMS** certificate

4+64GB Memory
Open CAD drawing in seconds

